

M34-2L**SINGLE OUTPUT LED FLASHER IC****GENERAL DESCRIPTION**

The M34 series is a low voltage single output LED flashing controller IC implemented by LSI CMOS technology. With built-in RC oscillator circuit, minimal external components are required. Various flashing frequencies are available for different applications.

FEATURE


- Typical 3VDC operating voltage, min. 1.35V and max. 4.5V
- Typical output current 16mA @3VDC
- Flashing frequency within +/-20% tolerance by internal RC oscillator

PRODUCT SERIES

- M34-1L or M34-1H or M2581 : 1 Hz , 1/8 duty cycle
- M34-2L or M34-2H : 2 Hz , 1/8 duty cycle
- M34-4L or M34-4H : 4 Hz , 1/8 duty cycle
- M34-8L or M2585 : 8 Hz , 1/2 duty cycle


APPLICATION EXAMPLES

Blinking badge, ear rings, greeting card, disco light, flashing torch, bicycle tailer light, signal lamp, instrument indicator, car alarm, warning light, X'mas decoration, toys, and etc.

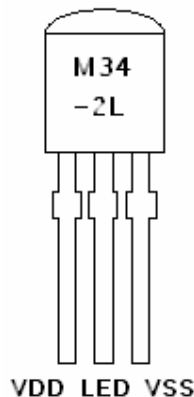PIN ASSIGNMENT**TO-92 (FRONT VIEW)**

<u>TOP MARKING</u>	<u>FREQ</u>
M34-1L	1Hz
M34-2L	2Hz
M34-4L	4Hz
M34-8L	8Hz

APPLICATION CIRCUIT

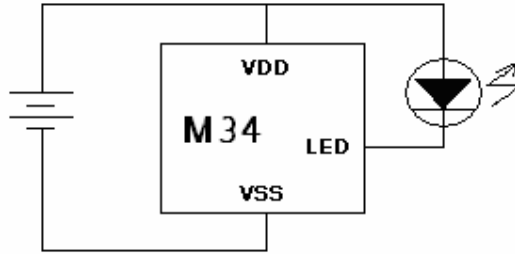

REV. 04-2005