

January 1990  
Edition 1.1



T-43-25

PRODUCT PROFILE

**FT5754M, FT5757M**

**Silicon Darlington Transistor Array**

**ABSOLUTE MAXIMUM RATINGS**

(Ta = 25°C)

Rating	Symbol	Condition	Value	Unit
Storage Temperature	T <sub>stg</sub>		-65 ~ +150	°C
Junction Temperature	T <sub>j</sub>		+150	°C
Collector to Base Voltage	V <sub>CE0</sub>		150	V
Emitter to Base Voltage	V <sub>EBO</sub>		5	V
Collector to Emitter Voltage	V <sub>CEO</sub>		100	V
Collector Current	(Continuous)	I <sub>C</sub>	±33	A
	(Pulsed)	I <sub>cp</sub>	P <sub>W</sub> ≤ 1 ms, D.R. ≤ 50%	±5
Base Current (Continuous)	I <sub>B</sub>		0.2	A
Diode Forward Current	I <sub>FM</sub>	P <sub>W</sub> ≤ 0.5 ms, D.R. ≤ 25% (*)	3	A
	I <sub>FSM</sub>	P <sub>W</sub> ≤ 100 ms, Single Pulse (*)	5	A
Diode Reverse Voltage	V <sub>R</sub>	Pin 3 - Pin 2, 4. Pin 10 - Pin 9, 11 (*)	110	V
Isolation Voltage	V <sub>iso</sub>	Pin 13 - Pin 1 ~ 12	500	V <sub>r.m.s.</sub>
Collector Power Dissipation	P <sub>C</sub>	Ta = 25°C: Single DLT operation	2.3	W
Total Collector Power Dissipation	P <sub>T</sub>	Ta = 25°C: 4-DLT operation	5	W
Total Collector Power Dissipation	P <sub>T</sub>	Tc = 25°C: 4-DLT operation	21	W

(\*) Fast recovery Diode

DLT: Darlington Transistor

**ELECTRICAL CHARACTERISTICS**

Single Darlington Transistor Operation

(Ta = 25°C)

Parameter	Symbol	Test Condition	Limit			Unit
			Min.	Typ.	Max.	
Collector to Base Breakdown Voltage	V <sub>(BR)CBO</sub>	I <sub>C</sub> = 100 μA, I <sub>E</sub> = 0	150	-	-	V
Emitter to Base Breakdown Voltage	V <sub>(BR)EBO</sub>	I <sub>E</sub> = 70 mA, I <sub>C</sub> = 0	5	-	-	V
Collector to Emitter Breakdown Voltage	V <sub>(BR)CEO</sub>	I <sub>C</sub> = 10 mA, R <sub>BE</sub> = ∞	100	-	-	V
Collector Cutoff Current	I <sub>CBO</sub>	V <sub>CB</sub> = 100 V, I <sub>E</sub> = 0	-	-	10	μA
DC Current Gain	h <sub>FE1</sub>	I <sub>C</sub> = 1.5 A, V <sub>CE</sub> = 5V (**)	2000	6000	15000	-
	h <sub>FE2</sub>	I <sub>C</sub> = 3.0 A, V <sub>CE</sub> = 5V (**)	500	-	-	-
Collector to Emitter Saturation Voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> = 1.5 A, I <sub>B</sub> = 3 mA (**)	-	1.2	1.5	V
Base to Emitter Saturation Voltage	V <sub>BE(sat)</sub>		-	1.7	2.0	V
Turn-On Time	t <sub>on</sub>	V <sub>CC</sub> = 30 V (***)	-	0.6	-	μs
Storage Time	t <sub>stg</sub>	I <sub>C</sub> = 1.5 A	-	1.8	-	μs
Fall Time	t <sub>f</sub>	I <sub>B1</sub> = I <sub>B2</sub> = 3 mA	-	0.6	-	μs

Single Fastrecovery Diode Operation (FT5754M Only)







(Ta = 25°C)

Parameter	Symbol	Test Condition	Limit			Unit
			Min.	Typ.	Max.	
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 100 mA	-	-	1.0	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> = 100 V	-	-	5	μA
Reverse Voltage	V <sub>R</sub>	I <sub>R</sub> = 10 μA	110	-	-	V

(\*\*) Pulsed Pulse Width ≤ 300 μs  
Duty Ratio ≤ 6%

(\*\*\*) Pulsed Pulse Width = 50 μs  
Duty Ratio ≤ 1%

FT5754M, FT5757M

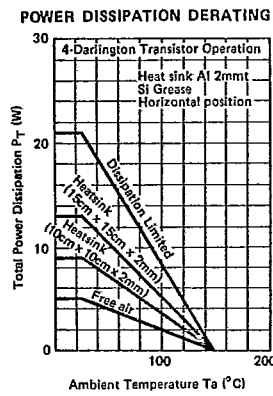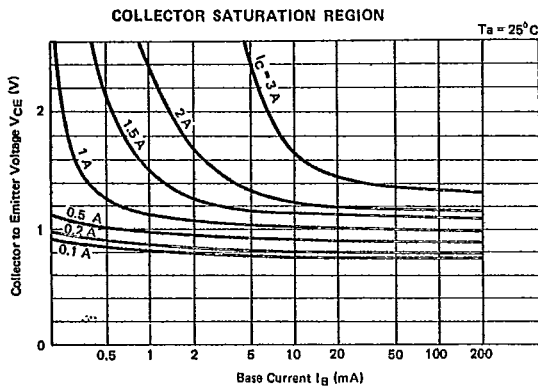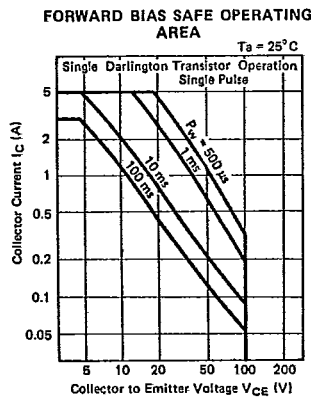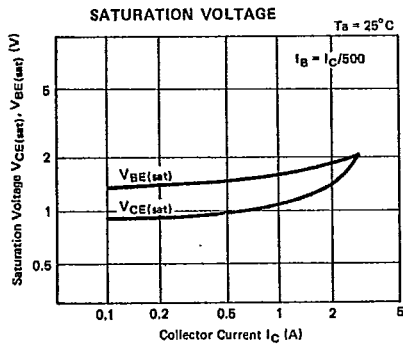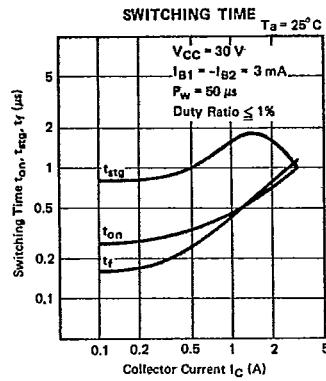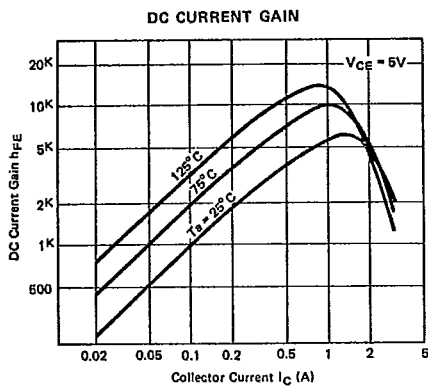

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.