
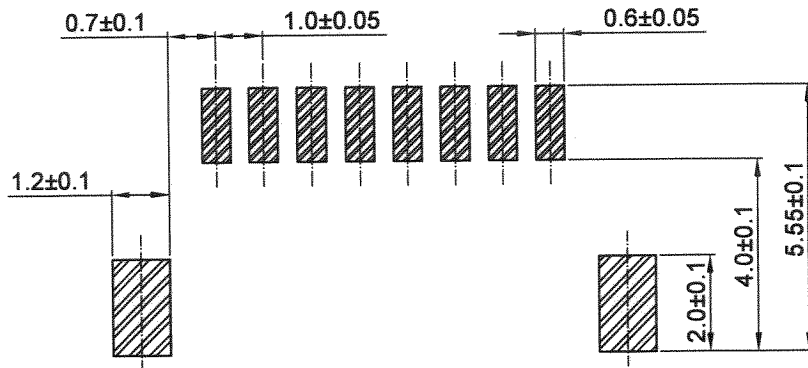
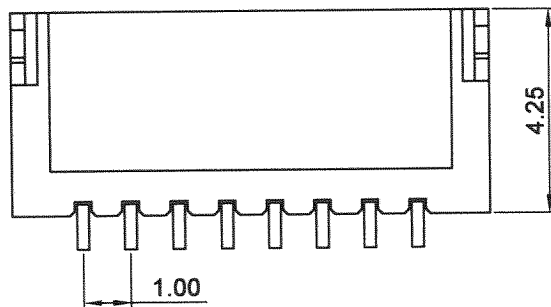


RoHS  
Compliant  
2002/95/EC

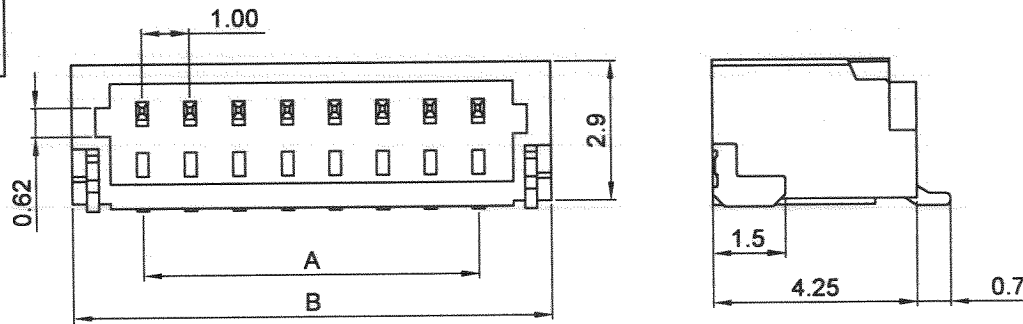

RECOMMENDED P.C.BOARD PATTERN DIM.

**SPECIFICATIONS**

**ELECTRICAL**

VOLTAGE RATING : 50V (AC)

CURRENT RATING : 1.0A

CONTACT RESISTANCE : 20 mΩ MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 500V AC / 1 MIN.

INSULATION RESISTANCE : 100 MΩ MIN.

**MATERIAL AND FINISH**

CIRCUITS : 2-16P & 20P

INSULATOR : NYLON-6T, UL94V-0

COLOR : NATURAL

CONTACT : PHOSPHOR BRONZE, TIN PLATED

PLATING : TIN PLATED

TEMPERATURE RANGE : -40°C ~ +105°C

Poles	Dimension mm	
	A	B
2	1.0	4.0
3	2.0	5.0
4	3.0	6.0
5	4.0	7.0
6	5.0	8.0
7	6.0	9.0
8	7.0	10.0
9	8.0	11.0
10	9.0	12.0
11	10.0	13.0
12	11.0	14.0
13	12.0	15.0
14	13.0	16.0
15	14.0	17.0
16	15.0	18.0
20	19.0	22.0

**JAWS** 兆旭股份有限公司  
JAWS CO., LTD.  
7F-1, NO.31, Lane 169, Kang Ning Street,  
Hsichih, Taipei Hsien, Taiwan.  
TEL: 886-2-2692-2898  
FAX: 886-2-2692-2618  
Http://www.jaws.com.tw

THIRD ANGLE  
PROJECTION

DESIGN UNITS  
mm INCH

TITLE: 1.00mm WIRE TO BOARD  
WAFER SMT SIDE ENTRY

GENERAL TOLERANCES:

DRAWN

游熾瑩

DATE 98/07/03

SIZE: A4 SCALE: FREE SHEET: 1/1

PARTS NO.: 100E-SR-xxT

X. ±N/A

CHECK

陳世寬

DATE 98.7.3

X.X ±0.25

CPN NO.:  
DAN NO.: S9807-001

DWG NO.: JAWS-SOP-100E001

REV. 01

X.XX ±0.15

APPROVE

陳世寬

DATE 98.7.3

ANGLE ±N/A