
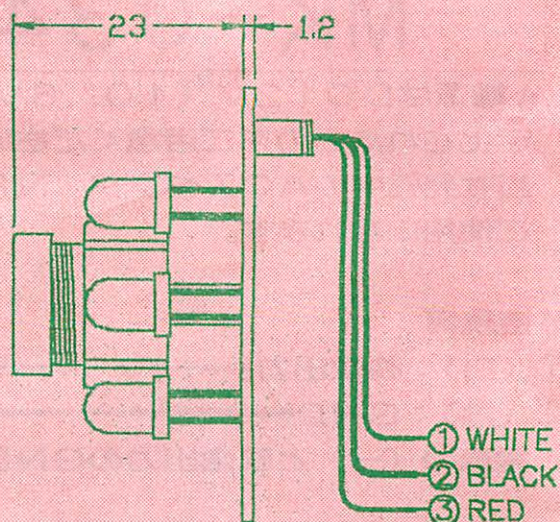


MK-0343E /MK-0343C INSTRUCTION

DIMENSION (UNIT:mm)

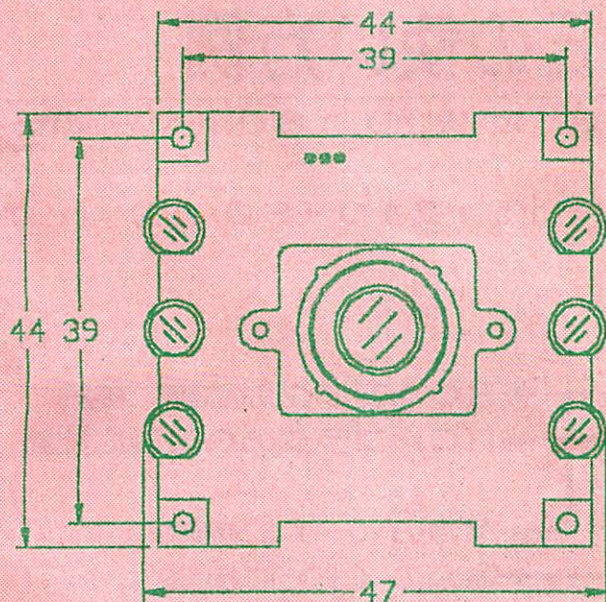

[1]White wire : for video out

[2]Black wire : for ground

[3]Red wire : for DC+12V

SPECIFICATION

MODEL NO.	MK-0343E	MK-0343C
IMAGE SENSOR DEVICE	1/3" interline transfer CCD	
IMAGE SENSOR AREA	4.8mm x 3.6mm	
HORIZONTAL FREQUENCY	15.734KHz	15.625KHz
VERTICAL FREQUENCY	59.9Hz	50Hz
TOTAL PIXELS	537(H) x 505(V)	537(H) x 597(V)
SCANNING SYSTEM	525 lines, 60 fields/sec EIA	625 lines, 50 fields/sec CCIR
RESOLUTION	420 TV lines horizontal	
MINIMUM ILLUMINATION	0 lux With IR-LED	
ELECTRONIC SHUTTER	Auto electronic shutter 1/60 to 1/100000 sec. continual	Auto electronic shutter 1/50 to 1/100000 sec. continual
S/N RATIO	Better than 48 dB	
VIDEO SIGNAL OUTPUT	1.0Vp-p composite video signal at 75 ohm load	
GAMMA CORRECTION	0.45	
GAIN CONTROL	Auto Gain Control	
POWER SUPPLY	12V DC \pm 10%	2.1W
LENS & VIEW ANGLE	3.7 mm F2.0 / 92°	
OPERATING TEMPERATURE	-20 °C to 55°C	
OPERATING HUMIDITY	within 85% RH	
DIMENSIONS & WEIGHT	44(W) x 44(H) x 23(D) mm / 25g	

* The specifications and appearance of the product may changed without notice.

赤外線投光器付きCCD白黒カメラ MK-0343Eの使い方

★電源はDC12V（10.8V～13.2V動作）180mA以上の安定化されたものをご用意ください。

当社発売中のACアダプタ NP12-1S1210（800円）などをご使用になれます。

■接続■

- ①（白）：映像出力 → RCAプラグの芯線に接続
- ②（黒）：GND → RCAプラグのGNDに接続
電源の（-）と映像出力のGND共用 → 電源の（-）に接続
- ③（赤）：電源（+） → 電源の（+）に接続

■接続例■

