



版本：V2.2


本圖面若與目錄之規格尺寸不符，以本圖面規格尺寸為主。
Below is our main specification if different from catalog.

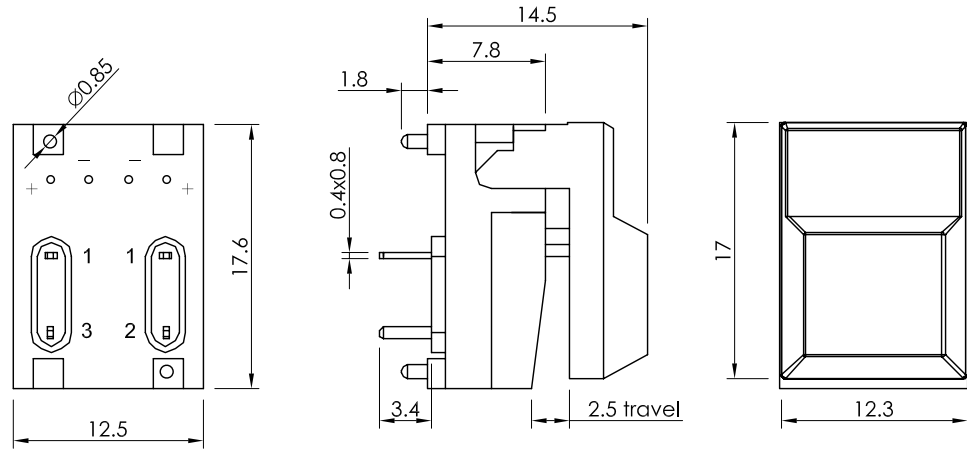


P.C.B. MOUNTING HOLES

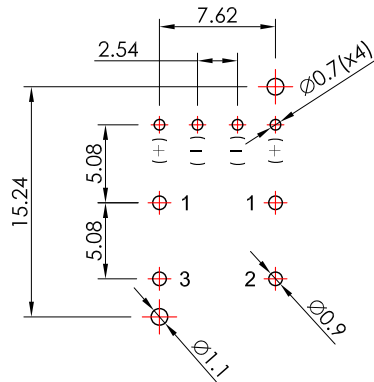

CONTACT CONFIGURATION



CAP STYLES

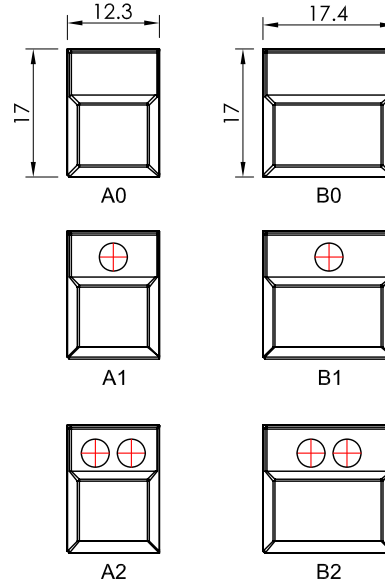

參考資料

RoHS compliant

LED COLOR LEFT		LED COLOR RIGHT	
□	W/O LED	□	W/O LED
1	Red	1	Red
2	Yellow	2	Yellow
3	Green	3	Green

RoHS compliant

MP86XXXXH-G

CAP STYLE		CAP OR CARD COLOR	
A0	W/O LED	R	Red
A1	1 LED	G	Gray
A2	2 LED	B	Black
B0	W/O LED	W	White
B1	1 LED	Y	Yellow
B2	2 LED	O	Orange
		BU	Blue
		GN	Green
		BR	Brown

SPECIFICATION

Circuit: SPST.
Current rating: 12mA.
Voltage rating: 24V DC.
Contact resistance: 50mΩ Max (initial).
Insulation resistance: 100MΩ Min.
Operating force: 170±50g.
Total travel: 2.5±0.2mm.
Operating life: 50,000 cycles Min.
Soldering specifications: 250°C Max for 3 Sec.
Function: Momentary.
Operating temperature: +10°C ~ +60°C.

MATERIAL

Cap: ABS.
Case: Nylon.
Fixed contact: PBS+Au.
Moving contact: PBS+Au.



V2.1	△		
V2.0	無	新繪製	2006.07.05
版本 VER.	符號 SYMBOL	修改內容 ALTERATION	更新日期 DATE

產品 PRODUCT		Pushbutton Switch		型號 MODEL NO.		MP86 XXXX H-G	
製圖 DRAWN BY	核圖 CHECKED BY	主管 APPROVED BY	單位 UNIT	mm			
Charlie Fong	Alex Lin	Margaret Lee	比例 SCALE	1 : 1			
			公差 TOLERANCE	.X=±0.3mm, .XX=±0.2mm			

SWITRONIC
INDUSTRIAL CORP.
Switches



一綺電子企業股份有限公司

總公司：110 台北市信義路四段415號12樓之2
12F-2 NO. 415, SEC. 4, HSIN YI ROAD, TAIPEI (110), TAIWAN
TEL: 886-2-27290229 (Rep.) FAX: 886-2-27582086
URL: http://www.switronic.com.tw
E-MAIL: switches@ms36.hinet.net