




# SPL (Hong Kong) Limited

Rm 2507, 25/F, Prosperity Centre, 25 Chong Yip St., Kwun Tong, Kln., HK.  
Tel: 852-23426867 / 57 Fax: 852-23426847 Email: sales@spl-hk.com.hk  
www.buzzer.com.hk ; www.transducer.com.hk ; www.connector.com.hk

## Piezo Buzzer SPB03 series

### DIMENSIONS

Date : 28 May, 2008

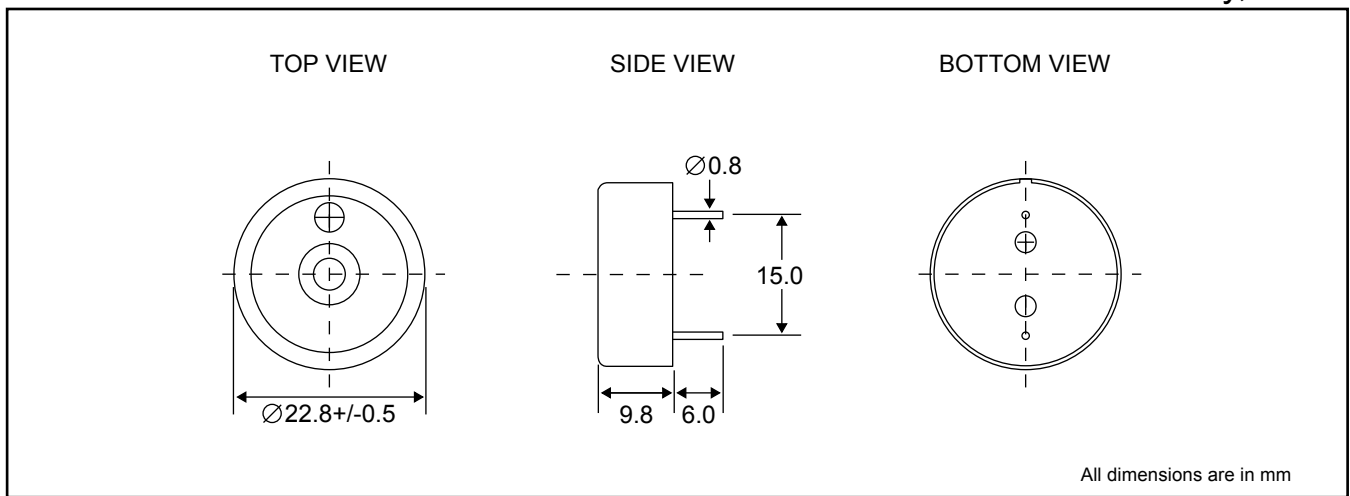

Ref. no. : PC016GC-R

Remark : RoHS compliance

### ELECTRICAL SPECIFICATIONS

Model No.		PB03-SD12HPR
Operating Voltage <input type="checkbox"/>	[VDC]	3 ~ 18
Rated Voltage <input type="checkbox"/> <input type="checkbox"/>	[VDC]	12
* Max. Rated Current <input type="checkbox"/>	[mA]	10
* Min. Sound Output <input type="checkbox"/>	[dBA / 30cm]	85
* Frequency <input type="checkbox"/> <input type="checkbox"/>	[Hz]	3500 +/- 500
Tone Nature		Single
Operating Temperature <input type="checkbox"/>	[°C]	-20 ~ +60
Storage Temperature <input type="checkbox"/>	[°C]	-30 ~ +70
Terminal		Pin
Housing Material		PBT
Colour		Black
Weight <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	[gm]	4

\*Value applying at rated voltage