




REED SENSOR SP3-1A16-3A

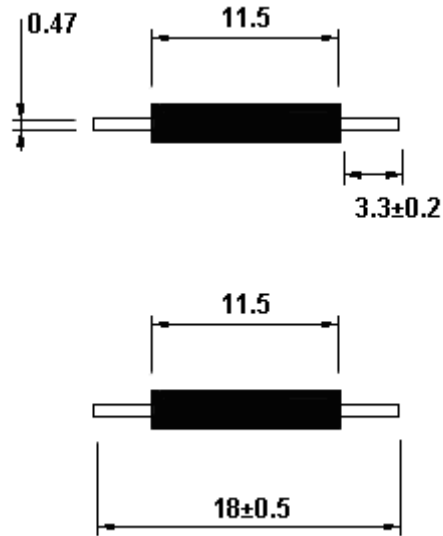

Specifications

Contact form	1A
Contact material	Ru
Maximum switching power , W	15
Maximum switching voltage , V	150
Maximum switching current, A	0.5
Pull in , AT	08-30
Drop out, AT min	4
Contact resistance, Ohm max	0.1
Breakdown voltage, V dc min	200
Insulation resistance, Ohm min.	10 <sup>9</sup>
Operate time, ms max.	0.5
Release time, ms max.	0.3
Capacitance, pF max	0.5
Resonant frequency, Hz min	5000
Operate temperature range, °C	-60...+125
High humidity at T=35°C, % max.	98