


版本：V2.2




本圖面若與目錄之規格尺寸不符，以本圖面規格尺寸為主。
Below is our main specification if different from catalog.

RoHS compliant

參考資料

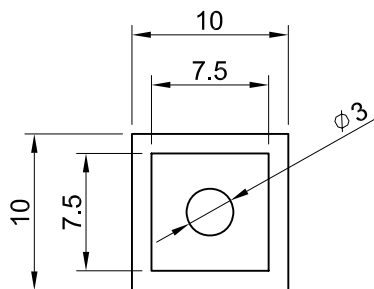

P.C.B. LAYOUT

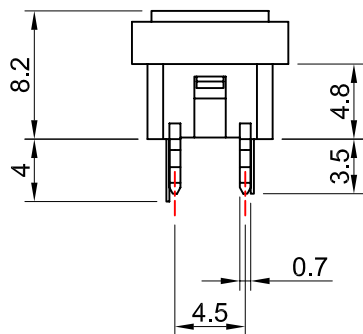

CAP COLOR	
R	Red
B	Black
O	Orange
I	Ivory
G	Gray
GN	Green
W	WHITE

RoHS compliant

TS-ALXXXH-G


HOUSING COLOR	
B	Black
G	Light Gray

LED COLOR	
R	RED
Y	Yellow
G	Green

SPECIFICATION

- Circuit:** SPST.
- Rating:** 50mA 12V DC.
- Dielectric withstanding voltage:** 250V AC for 1 minute.
- Contact resistance:** 100mΩ Max. (initial)
- Insulation resistance:** 100MΩ Min.
- Operating force:** 180±30g
- Total travel:** 0.25±0.2mm.
- Operating life:** 100,000 Cycles Min.
- Solder specifications:** 250°C Max for 3 Sec.
- Function:** Momentary.
- Operating temperature:** +10°C ~ +60°C.

CIRCUIT



VER.	SYMBOL	ALTERATION	DATE
V2.1	△		
V2.0	無	新繪製	2005.09.15
版本	符號	修改內容	更新日期
VER.	SYMBOL	ALTERATION	DATE

產品 PRODUCT		型號 MODEL NO.	
Pushbutton Switch		TS-ALXXX H-G	
製圖 DRAWN BY	核圖 CHECKED BY	主管 APPROVED BY	單位 UNIT
Johnson Lin	Alex Lin	Margaret Lee	mm
		比例 SCALE	公差 TOLERANCE
		1 : 2	.X=±0.3mm, .XX=±0.2mm

SWITRONIC
INDUSTRIAL CORP.
Switches



一綺電子企業股份有限公司

總公司：110 台北市信義路四段415號12樓之2
12F-2 NO. 415, SEC. 4, HSIN YI ROAD, TAIPEI (110), TAIWAN
TEL : 886-2-27290229 (Rep.) FAX : 886-2-27582086
URL : http://www.switronic.com.tw
E-MAIL : switches@ms36.hinet.net