


# TSKA-2JL

参考資料


# 面実装超薄型タクトスイッチ

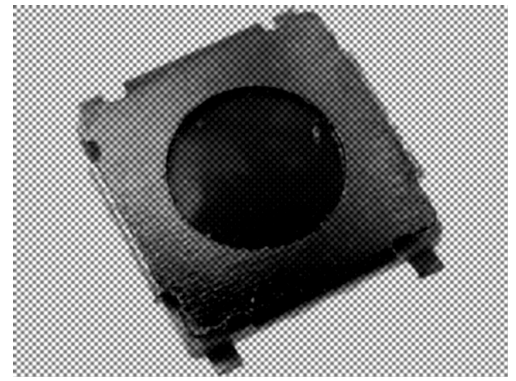

TYPE OF ACTUATION Tactile feedback


CONTACT ARRANGEMENT 1 poles 1 throws  
(Details of contact arrangement are given in the assembly drawings.)

MAXIMUM RATINGS DC 12 V 50 mA

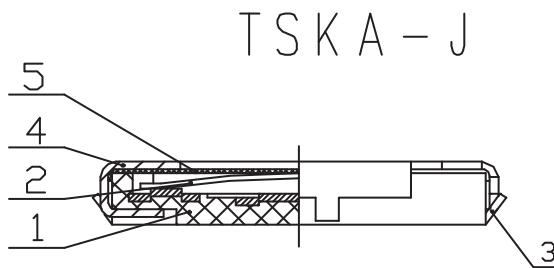





ITEM	COMPONENTS	MATERIAL ARTICLE	SPECIFICATION
1	HOUSING	HIGH TEMPERATURE MATERIAL	L.C.P
2	CONTACT	STAINLESS STEEL STRIP SILVER	SUS301-EH Ag 0.5 $\mu$
3	TERMINAL	TIN BRONZE	Ag 0.5 $\mu$ JIS H3110 C5191R(FOIL)-H
4	FRAME	STAINLESS STEEL OR TIN SHEET	JIS G3303 SPTE
5	TAPE	POLYIMIDE FILM UR	92#-3M

TSKA-J

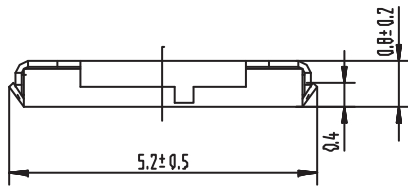

The length	Tolerance range
L<10	±0.3
10<L<100	±0.5
100<L	±0.6

Circuit diagram

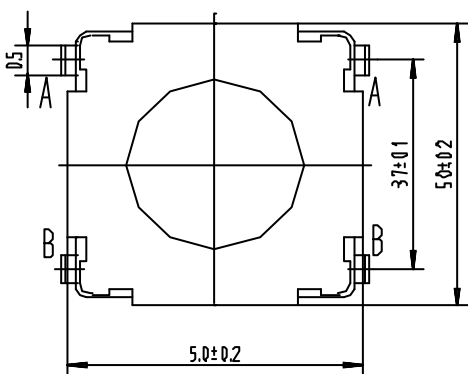

Printed circuit board mounting land dimensions

Unit:mm

MODEL	DIM-h	STEM COLOR	ACTUATING FORCE(gf)	RETURN FORCE(gf)	SHAPE
TSKA-1JL	0.8		100 $\pm$ 50	30 Min	
→ TSKA-2JL	0.8		160 $\pm$ 50	50 Min	
TSKA-3JL	0.8		260 $\pm$ 70	50 Min	