

**Tops 100 Power Pure White LED** 

OSW4XAHDE1E

VER.1

-0.3

Cathode

2.0

## Outline Dimension

50°

(Ta=25)

56.0

40.0

Ö

 $O \mid C$ 

 $O \mid C$ 

310

+

6

• High-power LED

Features

- Long lifetime operation
- Typical viewing angle : 140deg
- RoHS compliant
- Possible to attach to heat sink directly without using print circuit board.
- Applications
- Indoor & outdoor lighting
- Stage lighting
- Reading lamps
- Display cases, furniture illumination, marker
- Architectural illumination
- Spotlights

### **•**Absolute Maximum Rating

	5		
Item	Symbol	Value	Unit
DC Forward Current *1	$I_{\rm F}$	3,500	mA
Pulse Forward Current*2	I <sub>FP</sub>	4,000	mA
Reverse Voltage	V <sub>R</sub>	50	V
Power Dissipation*1	P <sub>D</sub>	157,500	mW
Operating Temperature	Topr	-30 ~ +85	
Storage Temperature	Tstg	-40~ +100	
Lead Soldering Temperature	Tsol	260 /5sec	-




.ø3,5

Unit:mm

Tolerance:±0.20mm

Tolerances are for reference only



\*1, Power dissipation and forward current are the value when the module temperature is

set lower than the rating by using an adequate heat sink.

\*2, Pulse width Max.10ms Duty ratio max 1/10

Electrical -Optical Characteristics (Ta=25)						
Item	Symbol	Condition	Min.	Тур.	Max.	Unit
DC Forward Voltage	$V_{\rm F}$	I <sub>F</sub> =3000mA	35	38	45	V
DC Reverse Current	I <sub>R</sub>	V <sub>R</sub> =50V	-	-	100	μA
Luminous Flux	v	I <sub>F</sub> =3000mA	5500	7200	-	lm
Color Temperature	CCT	I <sub>F</sub> =3000mA	-	6500	-	Κ
Chromaticity	х	I <sub>F</sub> =3000mA	-	0.31	-	
Coordinates*	у	I <sub>F</sub> =3000mA	-	0.34	-	
50% Power Angle	2 <del>0</del> 1/2	I <sub>F</sub> =3000mA	-	140	-	deg

Note: Don't drive at rated current more than 5s without heat sink for High Power series.

\* Tolerance of chromaticity coordinates is  $\pm 10\%$ ,

\* Tolerance of Luminous Flux is  $\pm 20\%$ 

# LED & Application Technologies











**Tops 100 Power Pure White LED** 

**OSW4XAHDE1E** 

VER.1

### Heat design


The following pictures show some measurements of mounted 5W Led on the heat sink for each board A and B (See Fig 1) with using thermograph to make an observation about heat distribution. Each boards is tested at various current conditions. As a result, LED needs larger heat sink as much as possible to reduce its own case temperature.

rig. 1 Configuration pattern examples for board assembly						
Board	LED power	Material	Surface area (mm²) Min.			
А	5W	Al	10,300			
В	10W	Al	20,600			
С	25W	Al	51,500			
D	50W	Al	103,000			
Е	100W	Al	206,000			
F	200W	Al	412,000			
G	300W	Al	618,000			


#### Fig. 1 Configuration pattern examples for board assembly

Above tested LED device is attached with adhesive sheet to the heatsink.

For reference's sake, Tj absolute maximum rating is defined at 115

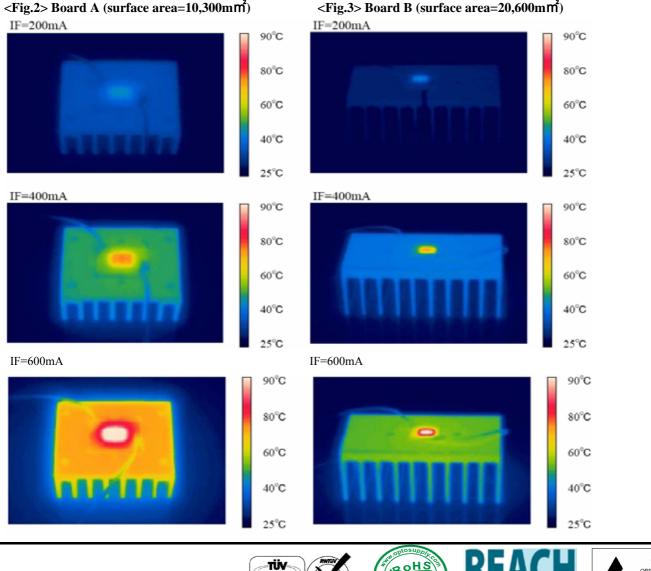

**LED & Application Technologies** 









ATTENTION OBSERVE PRECAUTIONS ELECTROSTATIC SENSITIVE DEVICES

as a prerequisite on design process of 5W LED.